


3S 1.5-80

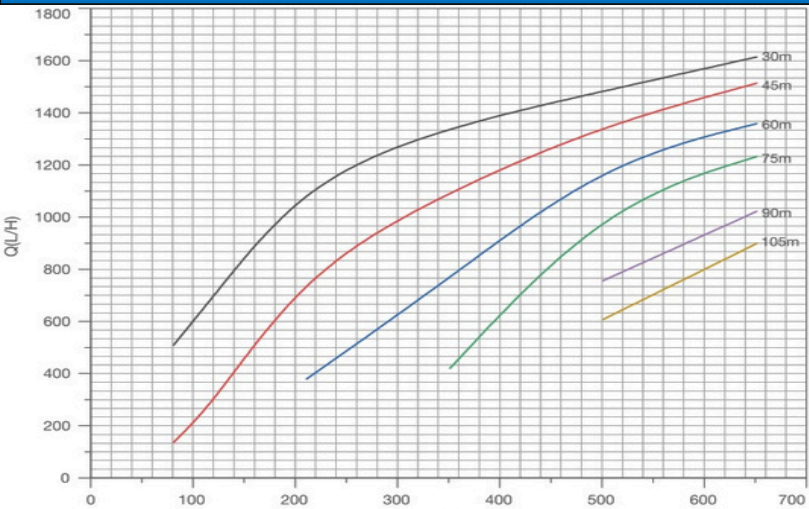

MODELO		POTENCIA ABSORBIDA (W)					
3S 1.5-80		80	120	210	350	500	650
		CAUDAL (LITROS/HORA)					
ALTURA (M)	30	510	702	1144	1351	1483	1615
	45	138	292	799	1103	1354	1514
	60	/	/	380	766	1211	1359
	75	/	/	/	421	1049	1233
	90	/	/	/	/	757	1023
	105	/	/	/	/	608	899

3S 1.5-80

Tabla especificaciones técnicas

Controladora	Externa (Incluida)	Profundidad de inmersión	150 m
Cv (HP)	0,5 cv	AC Voltage	/
Cableado	(U, V, W)	DC Voltage	40-105V
Altura max	110m	Mejor funcionamiento VMP	48-100V
Diametro de la bomba	3"	Tipo de impulsor	Helicoidal
Salida BSP de la bomba	0,75 "	Necesidad de sonda	Si

