


3S 3-8

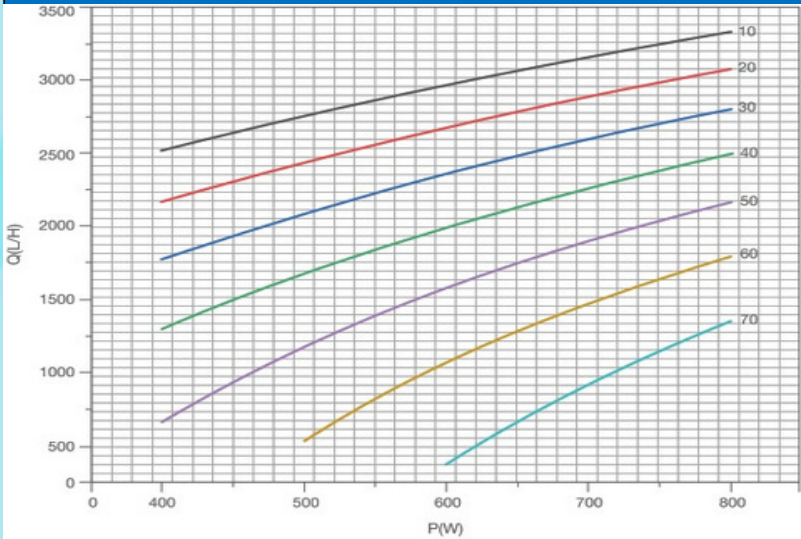

MODELO		POTENCIA ABSORBIDA (W)				
3S 3-8		400	500	600	700	800
		CAUDAL (LITROS/HORA)				
ALTURA (M)	10	2523	2765	2973	3163	3335
	20	2176	2447	2684	2890	3078
	30	1779	2094	2368	2595	2802
	40	1303	1689	2014	2270	2502
	50	685	1200	1605	1904	2170
	60	/	530	1102	1477	1794
	70	/	/	371	941	1350

3S3-8

Tabla especificaciones técnicas

Controladora	Externa (Incluida)	Profundidad de inmersión	150 m
Cv (HP)	0,75 cv	AC Voltage	/
Cableado	(U, V, W)	DC Voltage	40-105V
Altura max	80m	Mejor funcionamiento VMP	48-100V
Diametro de la bomba	3"	Tipo de impulsor	Plástico
Salida BSP de la bomba	1,25 "	Necesidad de sonda	No

