


4SP3-9 1.5HP

Caudalmax.106L/min;Alturamax.80m; BSP 1.25" (Impulsor de acero inoxidable)

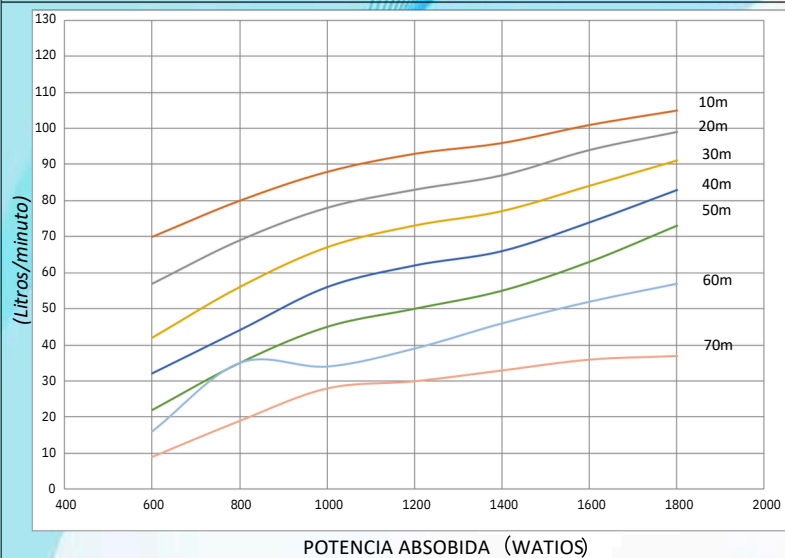

ALTURA (m)	POTENCIAABSORBIDA (WATIOS)						
	600	800	1000	1200	1400	1600	1800
	CAUDAL(LITROS/HORA)						
10	4200	4800	5280	5580	5760	6060	6300
20	3420	4140	4680	4980	5220	5640	5940
30	2520	3360	4020	4380	4620	5040	5460
40	1920	2640	3360	3720	3960	4440	4980
50	1320	2100	2700	3000	3300	3780	4380
60	960	2100	2040	2340	2760	3120	3420
70	540	1140	1680	1800	1980	2160	2220

4SP3-9 1.5HP	
Tabla de especificaciones técnicas	
Controladora	Externa (INCLUIDA)
Tipo impulsor	Centrífuga
Altura Max	80 m
Caudal Max	106 L/m
Cv (hp)	1.5
Potencia P1	1,8 Kw
Rango DC	60-380 Vmp (Max 440 Voc)
Rango AC	90-240 V
Cableado	3 hilos (U,V,W)
Motor	4"
Salida BSP	1,25"
Material de fabricación	Acero inoxidable Asi 304
Profundidad de inmersión	150 m

