


3S 1.5-160

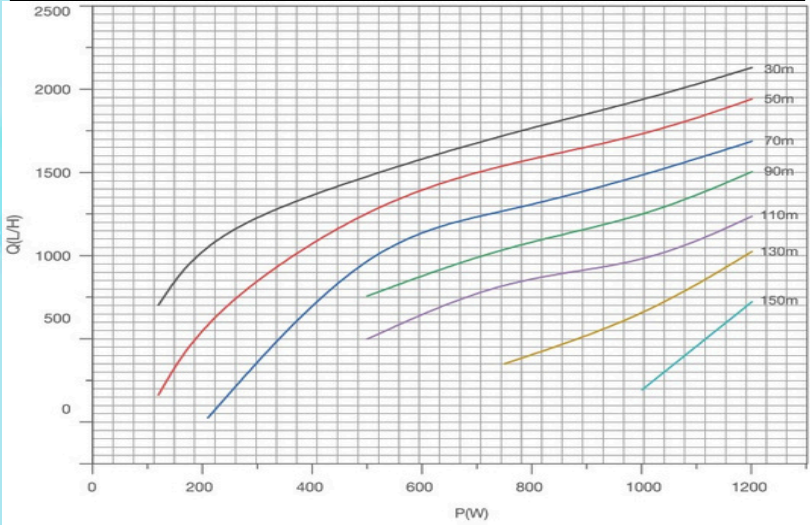

MODELO		POTENCIA ABSORBIDA (W)					
3S 1.5-160		120	210	500	750	1000	1200
		CAUDAL (LITROS/HORA)					
ALTURA (M)	30	702	1144	1483	1731	1930	2129
	50	163	670	1308	1557	1713	1941
	70	/	25	1105	1259	1478	1688
	90	/	/	757	1062	1221	1504
	110	/	/	499	874	934	1236
	130	/	/	/	350	624	1024
	150	/	/	/	/	193	722

3S 1.5-160

Tabla especificaciones técnicas

Controladora	Externa (Incluida)	Profundidad de inmersión	150 m
Cv (HP)	1,5 cv	AC Voltage	/
Cableado	(U, V, W)	DC Voltage	70-150V
Altura max	160m	Mejor funcionamiento VMP	72-144V
Diámetro de la bomba	3"	Tipo de impulsor	Helicoidal
Salida BSP de la bomba	0,75 "	Necesidad de sonda	Si

